

Medical and Lavatory Faucets

B-2820


,	
Easy Install	Concealed Widespread Metering Faucet

TAG:

Architect/Engineering Specifications:

8" concealed deck mount mixing faucet with forged brass body, rigid gooseneck with stream regulator outlet, metering cartridges, push button caps, chrome plated escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	

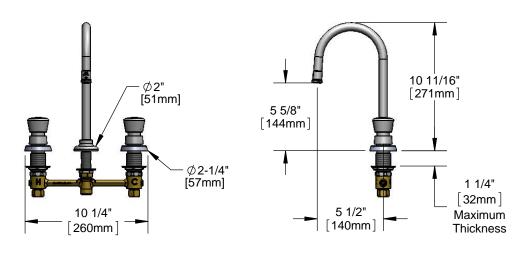



Features & Benefits:

- 8" EasyInstall concealed deck mount mixing faucet w/ forged brass body
- 5 1/2" rigid gooseneck
- Stream regulator outlet, Series 2
- · Metering cartridges
- Adjustable metering cycle 10 to 30 seconds
- Push button caps w/ vandal resistant screw
- 1/2" NPSM male inlets with coupling nuts
- Material: Brass body, chrome plated metal handles and escutcheons, polished chrome plated brass tubular spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

LOW LEAD COMPLIANT

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 5.31 GPM @ 60 psi

Water Consumption: @ 10 sec = .89 gal

@ 15 sec = 1.3 gal



Optional Outlets (Series 2 / VR Series 7)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Cartridges
0.35	N/A	□ B-0199-02-N035	N/A	□ B-0199-07-N035	□ Push Button Metering (Standard)
0.5	N/A	□ B-0199-02-N05	N/A	□ B-0199-07-N05	□ Pivot Action Metering
1.0	□ B-0199-02-F10	N/A	□ B-0199-07-F10	N/A	□ Wrist Action Metering
1.5	□ B-0199-02-WS	N/A	□ B-0199-07-WS	N/A	
2.2	□ B-0199-02	N/A	□ B-0199-07	N/A	







T&S BRASS AND BRONZE WORKS, INC.

