

► Description

Top Mount Single Lever Lavatory Faucet

► Models

- ☐ **QT-1320-4** Single Lever Lavatory Faucet
- ☐ **QT-1330-4** Single Lever Lavatory Faucet with Pop-up Drain

► Flow Rate

- ☐ 2.2 gpm/8.3 Lpm Max. Spray Head
- (See **Accessories** for other Spray Head options)

► Specifications

Chrome Plated Forged Brass Body, Single Lever Lavatory Faucet with the following features:

- Metal Lever Handle with Color Coded Index Button
- Adjustable Temperature Limit Stop
- Ceramic Cartridge
- One-piece Forged Brass Body
- Integral Spout/Body
- Aerated Outlet (2.2 gpm/8.3 Lpm Max.)
- Chrome Plated Metal Trim Plate
- Brass Pop-up Drain Assembly (Model QT-1330-4 Only)
- Universal Base Assembly for easy installation
- Two (2) 24-inch Stainless Steel Hoses w/3/8" Female Compression Inlet
- Mounting Hardware and Sealing Gasket Included


► Accessories

- ☐ 0.5 gpm/1.9 Lpm Max. Spray Head
- ☐ Pop-up Drain (Model QT-1330-4 Only)

Note:

Alternate Aerators available upon request.

► Faucet Dimensions

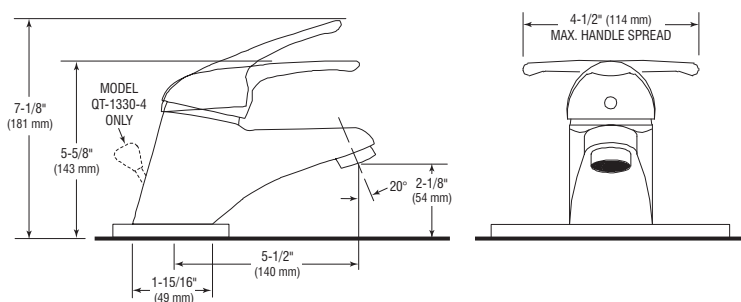

► Features

- Brass Construction
- Chrome Plated Finish
- Aerated Outlet
- Temperature Limit Stop
- Ceramic Cartridge
- Metal Trim Plate
- Coupling Nuts, Sealing Gasket and Mounting Hardware included

► Compliant to:

- ASME A112.18.1M
- NSF 61, Sec. 9
- CSA B125
- ADA

► Warranty

3 year (limited)



Listed by I.A.P.M.O.



This space for Architect/Engineer approval

Job Name _____ Date _____

Model Specified _____ Quantity _____

Variations Specified _____

Customer/Wholesaler _____

Contractor _____

Architect _____

SLOAN VALVE COMPANY • 10500 SEYMOUR AVE. • FRANKLIN PARK, IL. 60131
Ph: 1-800-9-VALVE-9 or 1-847-671-4300 • Fax: 1-800-447-8329 or 1-847-671-4380
www.sloanvalve.com