


For Commercial & Residential Applications


Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

FloodSafe™
Braided Stainless Steel
Dishwasher Connectors

Features

- Available in 60" (1524mm) length
- NSF & IAPMO Listed 
- Only economical and secure safeguard against catastrophic water damage available on the market
- Patented design
- No mechanical moving parts during normal operation, ensuring years of maintenance free operation
- Does not require electricity, batteries or any other source of power
- Maintenance free
- Installs between the stop valve and the fixture/appliance with the FloodSafe™ device located at the stop valve

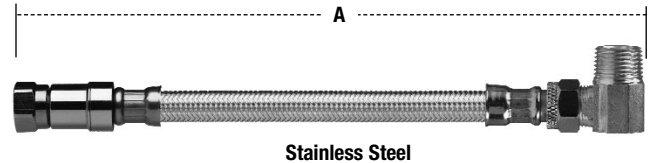

Pressure – Temperature

Maximum Temperature: 180°F (82°C)
 Maximum Pressure: 125psi (8.75 bar)

MODEL	✓ TO SUBMIT	DESCRIPTION	DIMENSIONS		MATERIAL
			<i>in.</i>	<i>mm.</i>	
FS-4560DWSS		3/8" x 3/8"	60	1524	Stainless Steel



Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

815 Chestnut St., No. Andover, MA 01845
 Tel: 978.688.1811 • Fax: 978.794.1848
 www.wattsbrass-tubular.com