

## For Commercial and Residential Applications

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Approval \_\_\_\_\_

Engineer \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Approval \_\_\_\_\_

Representative \_\_\_\_\_

# Series CTC-P

## Flexible Reinforced PVC Water Supply Connectors for Toilets

**Sizes: 3/8" to 7/8" (10 to 22mm)**

Series CTC-P Flexible Reinforced PVC Water Supply Connectors for Toilets are used in residential and commercial applications, specifically for hookups to a toilet water supply. These connectors provide protection from vibration and bursting under extreme pressure surges. Series CTC-P connectors consist of white flexible PVC tubing jacketed with braided nylon, an outer protective layer of PVC, and permanently attached, brass, compression end fittings. Various end connections are available.

### Features

- Available in lengths: 6", 9", 12", 16", and 20" (150, 230, 300, 400, 500mm)
- Tubing
  - PVC body
  - Braided nylon jacket
- Protective PVC outer layer
- Brass compression end fittings

### Standards



UPC Listed

### Pressure-Temperature

Maximum Working Pressure: 125psi (8.6 bar)

Maximum Temperature: 140°F (60°C)

**Note:** National residential plumbing codes reference the maximum operating temperature as 140°F (60°C). Plumbing fixtures are designed to ANSI—ASME A112 18.1 at 1125psi.



CTC-P-CB

### Models

- CTC-P-CB -** One end of the flexible connector is supplied with ballcock end fitting. The other end is supplied with a plated, solid brass compression end fitting for connection to a supply stop valve.
- CTC-P-FB -** One end of the flexible connector is supplied with a ballcock end fitting. The other end is supplied with a plated, solid brass female iron pipe thread fitting.
- CTC-P-TB -** One end of the flexible connector is supplied with a ballcock end fitting. The other end is supplied with a solid brass fine thread female iron pipe fitting.

### Materials

Tubing:

Body: PVC




Jacket: Nylon

Protective Layer: PVC

Fittings: Brass

# WATTS®

# Dimensions

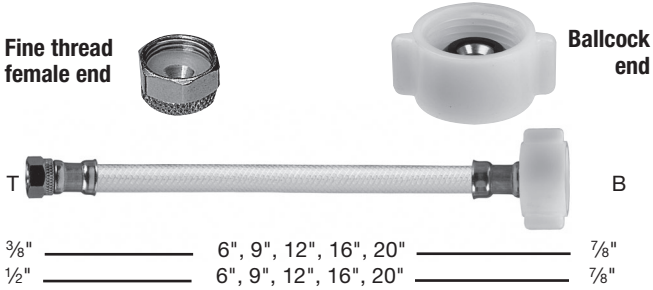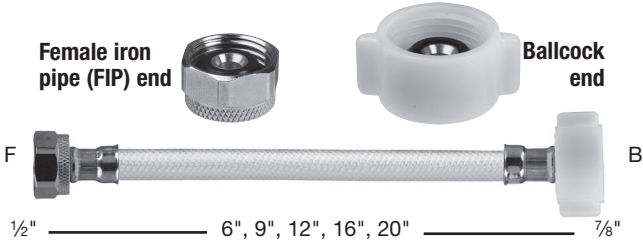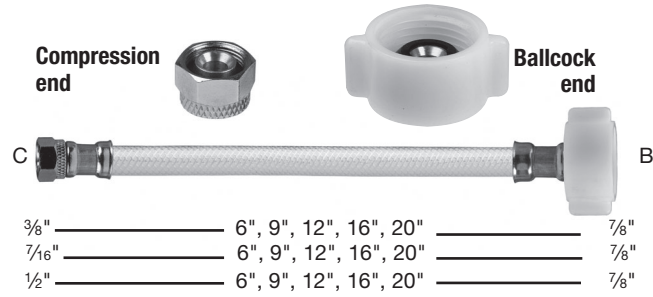

PRODUCT NO.	INDIVIDUAL SIZE	WGT. (LBS.)
CTC-P-CB	3/8" x 7/8" x 6"	0.08
CTC-P-CB	3/8" x 7/8" x 9"	0.10
CTC-P-CB	3/8" x 7/8" x 12"	0.12
CTC-P-CB	3/8" x 7/8" x 16"	0.16
CTC-P-CB	3/8" x 7/8" x 20"	0.20
CTC-P-CB	3/8" x 7/8" x 30"	0.30
CTC-P-CB	7/16" x 7/8" x 6"	0.08
CTC-P-CB	7/16" x 7/8" x 9"	0.10
CTC-P-CB	7/16" x 7/8" x 12"	0.12
CTC-P-CB	7/16" x 7/8" x 16"	0.16
CTC-P-CB	7/16" x 7/8" x 20"	0.20
CTC-P-CB	7/16" x 7/8" x 30"	0.80
CTC-P-CB	1/2" x 7/8" x 6"	0.08
CTC-P-CB	1/2" x 7/8" x 9"	0.10
CTC-P-CB	1/2" x 7/8" x 12"	0.12
CTC-P-CB	1/2" x 7/8" x 16"	0.16
CTC-P-CB	1/2" x 7/8" x 20"	0.20
CTC-P-CB	1/2" x 7/8" x 30"	0.30
CTC-P-FB	1/2" x 7/8" x 6"	0.08
CTC-P-FB	1/2" x 7/8" x 9"	0.10
CTC-P-FB	1/2" x 7/8" x 12"	0.12
CTC-P-FB	1/2" x 7/8" x 16"	0.16
CTC-P-FB	1/2" x 7/8" x 20"	0.20
CTC-P-TB	3/8" x 7/8" x 6"	0.08
CTC-P-TB	3/8" x 7/8" x 9"	0.10
CTC-P-TB	3/8" x 7/8" x 12"	0.12
CTC-P-TB	3/8" x 7/8" x 16"	0.16
CTC-P-TB	3/8" x 7/8" x 20"	0.20
CTC-P-TB	3/8" x 7/8" x 30"	0.30
CTC-P-TB	1/2" x 7/8" x 6"	0.08
CTC-P-TB	1/2" x 7/8" x 9"	0.10
CTC-P-TB	1/2" x 7/8" x 12"	0.12
CTC-P-TB	1/2" x 7/8" x 16"	0.16
CTC-P-TB	1/2" x 7/8" x 20"	0.20



Water Safety & Flow Control Products

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.watts.com  
 Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca