

For Commercial and Residential Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

Series CFC-S

Braided Stainless Steel Water Supply Connectors for Faucets

Sizes: 3/8" to 1/2" (10 to 15mm)

Series CFC-S Braided Stainless Steel Water Supply Connectors for Faucets are used in residential and commercial applications, specifically for hookups to the faucet water supply. These connectors provide protection from vibration and bursting under extreme pressure surges. Series CFC-S connectors consist of PVC tubing jacketed with braided stainless steel. Various end connections are available.

Features

- Available in lengths: 12", 16", 20", 24", 30", 36", 48", 60", and 72" (300, 400, 500, 600, 760, 900, 1200, 1500, 1800mm)
- Tubing
 - PVC body
 - Braided stainless steel jacket
- Brass compression end fittings and barbs
- Convenient for difficult installations
- NSF 61 approved hoses for safer drinking water
- No tube cutting or pending
- No soldering
- No extra adapters, fittings or couplings required

Approvals

Hoses are NSF 61 approved for safer drinking water

Standards

NSF and UPC Listed



Pressure-Temperature

Maximum Working Pressure: 125psi (8.6 bar)

Maximum Temperature: 180°F (82°C)



CFC-S-CC





Models

- CFC-S-CC** - Both ends of the flexible connector are supplied with plated, solid brass nut compression end fittings for connection to supply stop valves and faucets.
- CFC-S-CF** - One end of the flexible connector is supplied with a plated, solid brass compression end fitting for connection to a supply stop valve. The other end is supplied with a plated, solid brass female iron pipe thread fitting.
- CFC-S-FF** - Both ends of the flexible connector are supplied with a plated, solid brass female iron pipe thread fittings.
- CFC-S-TF** - One end of the flexible connector is supplied with a plated, solid brass female iron pipe thread fitting. The other end with a plated, solid brass fine thread female iron pipe fitting.

Materials

- Tubing:
 Body: PVC
 Jacket: Stainless steel
 Fittings: Brass

Dimensions

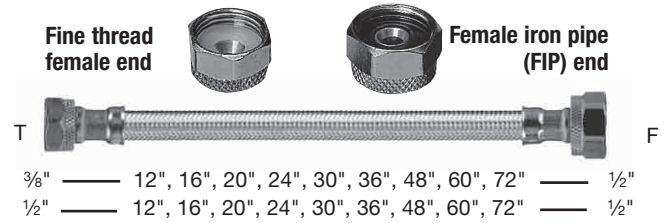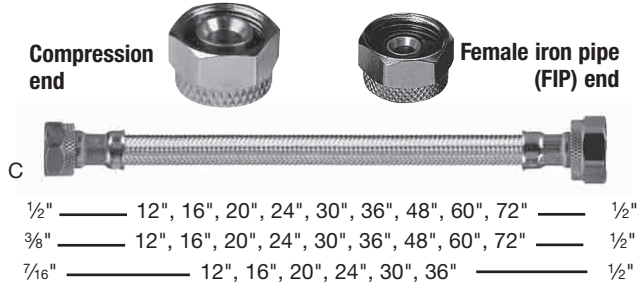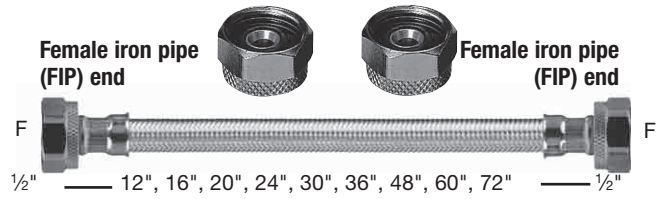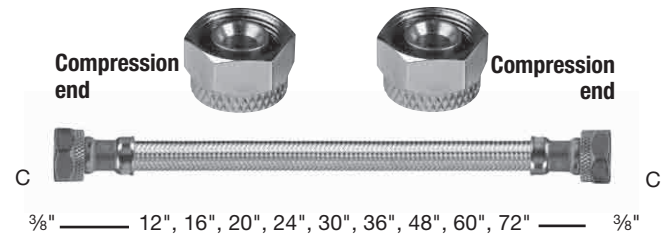

PRODUCT NO.	SIZE	INDIVIDUAL WGT. (LBS.)
CFC-S-CC	3/8" x 3/8" x 12"	0.12
CFC-S-CC	3/8" x 3/8" x 16"	0.18
CFC-S-CC	3/8" x 3/8" x 20"	0.20
CFC-S-CC	3/8" x 3/8" x 24"	0.24
CFC-S-CC	3/8" x 3/8" x 30"	0.75
CFC-S-CC	3/8" x 3/8" x 36"	0.90
CFC-S-CC	3/8" x 3/8" x 48"	1.20
CFC-S-CC	3/8" x 3/8" x 60"	1.50
CFC-S-CC	3/8" x 3/8" x 72"	1.80
CFC-S-CF	1/2" x 1/2" x 12"	0.12
CFC-S-CF	1/2" x 1/2" x 16"	0.16
CFC-S-CF	1/2" x 1/2" x 20"	0.20
CFC-S-CF	1/2" x 1/2" x 24"	0.24
CFC-S-CF	1/2" x 1/2" x 30"	0.75
CFC-S-CF	1/2" x 1/2" x 36"	0.90
CFC-S-CF	1/2" x 1/2" x 48"	1.20
CFC-S-CF	1/2" x 1/2" x 60"	1.50
CFC-S-CF	1/2" x 1/2" x 72"	1.80
CFC-S-CF	3/8" x 1/2" x 12"	0.12
CFC-S-CF	3/8" x 1/2" x 16"	0.16
CFC-S-CF	3/8" x 1/2" x 20"	0.20
CFC-S-CF	3/8" x 1/2" x 24"	0.24
CFC-S-CF	3/8" x 1/2" x 30"	0.75
CFC-S-CF	3/8" x 1/2" x 36"	0.90
CFC-S-CF	3/8" x 1/2" x 48"	1.20
CFC-S-CF	3/8" x 1/2" x 60"	1.50
CFC-S-CF	3/8" x 1/2" x 72"	1.80

PRODUCT NO.	SIZE	INDIVIDUAL WGT. (LBS.)
CFC-S-CF	7/16" x 1/2" x 12"	0.12
CFC-S-CF	7/16" x 1/2" x 16"	0.16
CFC-S-CF	7/16" x 1/2" x 20"	0.20
CFC-S-CF	7/16" x 1/2" x 24"	0.24
CFC-S-CF	7/16" x 1/2" x 30"	0.75
CFC-S-CF	7/16" x 1/2" x 36"	0.90
CFC-S-FF	1/2" x 1/2" x 12"	0.12
CFC-S-FF	1/2" x 1/2" x 16"	0.16
CFC-S-FF	1/2" x 1/2" x 20"	0.20
CFC-S-FF	1/2" x 1/2" x 24"	0.24
CFC-S-FF	1/2" x 1/2" x 30"	0.75
CFC-S-FF	1/2" x 1/2" x 36"	0.90
CFC-S-FF	1/2" x 1/2" x 48"	1.20
CFC-S-FF	1/2" x 1/2" x 60"	1.50
CFC-S-FF	1/2" x 1/2" x 72"	1.80
CFC-S-TF	1/2" x 1/2" x 12"	0.12
CFC-S-TF	1/2" x 1/2" x 16"	0.16
CFC-S-TF	1/2" x 1/2" x 20"	0.20
CFC-S-TF	1/2" x 1/2" x 24"	0.24
CFC-S-TF	1/2" x 1/2" x 30"	0.75
CFC-S-TF	1/2" x 1/2" x 36"	0.90
CFC-S-TF	1/2" x 1/2" x 48"	1.20
CFC-S-TF	1/2" x 1/2" x 60"	1.50
CFC-S-TF	1/2" x 1/2" x 72"	1.80
CFC-S-TF	3/8" x 1/2" x 12"	0.12
CFC-S-TF	3/8" x 1/2" x 16"	0.16
CFC-S-TF	3/8" x 1/2" x 20"	0.20
CFC-S-TF	3/8" x 1/2" x 24"	0.24
CFC-S-TF	3/8" x 1/2" x 30"	0.75
CFC-S-TF	3/8" x 1/2" x 36"	0.90
CFC-S-TF	3/8" x 1/2" x 48"	1.20
CFC-S-TF	3/8" x 1/2" x 60"	1.50
CFC-S-TF	3/8" x 1/2" x 72"	1.80

*The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.



A Watts Water Technologies Company



ISO 9001-2008 CERTIFIED

USA: No. Andover, MA • Tel. (978) 688-1811 • Fax: (978) 794-1848 • www.watts.com
 Canada: Burlington, ONT. • Tel. (905) 332-4090 • Fax: (905) 332-7068 • www.wattscanada.com