

AutoFresh™ Aerosol Dispenser

Air Delights

INSTALLATION INSTRUCTIONS

MOUNTING & OPERATING INSTRUCTIONS

Wall Mounting:

For effective operation, mount dispenser above eye level, a minimum of 7 feet (2.2m) from floor to bottom of dispenser. Ensure location is where moving air will disperse the Metered Aerosol throughout the entire area. Position dispenser over wall stud and secure with the supplied screws (2 screws). One Aerosol Dispenser treats up to 6,000 cubic feet (170m³).


Operating Instructions:

This unit contains a special no-key locking feature. If you do not want this locking feature, remove the locking pin from the cabinet by depressing the locking tab top prong, inside the dispenser, and push towards back of dispenser.

1. Open dispenser cover.
2. Position outer selector switch to OFF.
3. Insert two "D" cell alkaline batteries.
4. Position outer selector switch to ON-AUDIO for activating dispenser with audio and visual indicators, or, position outer selector switch to ON-QUIET for activating dispenser with visual indicators only.

5. Activate the SPRAY TIMER for 2 seconds by pressing the red button. **IMPORTANT:** Do this every time the metered aerosol is replaced.
6. Select the desired SPRAY TIME INTERVAL.
7. Select the period of desired OPERATION MODE:
ON - operates 24 hours-a-day.
DAY - operates only when it's light.
NIGHT - operates only when it's dark.
8. Place a Metered Aerosol into dispenser.
9. Close dispenser cover.
10. To reactivate dispenser, while standing to the side, turn outer switch OFF and then ON-AUDIO or ON-QUIET again.

CAUTION: Never stand directly in front of the dispenser when the outer switch is in the ON-AUDIO or ON-QUIET position. When replacing metered aerosols, the outer switch should be in the OFF position to avoid being sprayed in the face.

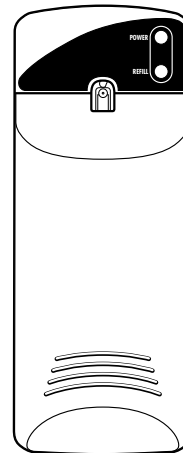

Air Delights

www.airdelights.com

1-800-440-5556 • 1-503-643-8224 (Fax) 9974 SW Arctic Dr. Beaverton, Or. 97005