# BASYS® SENSOR FAUCET EFX-600-HLP-BDT-CP-1.5GPM-MLM-IR-FCT

(General Model Name: EFX600.203.0000 CP SENSOR FAUCET)

#### **CODE NUMBER**

3324484

#### **DESCRIPTION**

Hardwired Less Plug Power Supply, Below Deck Thermostatic Mixing Valve, Polished Chrome Finish, 1.5 gpm, Multi-Laminar Spray, Infrared Sensor, BASYS® Hardwired-Powered Deck-Mounted Low Integrated Base Body Faucet.

## **DETAILS**

Flow Rate: 1.5 gpm (6 Lpm) (1.5GPM)
Spray Type: Multi-Laminar (MLM)

Sensor Type: Infrared (IR)Mounting Type: Single Hole

• Power Supply: Hardwired Less Plug (HLP)

• Temperature Mixer: Below Deck Thermostatic Mixing Valve (BDT)

Finish: Polished Chrome (CP)
Factory Default Timeout: 10s
Factory Default GPC: 0.75

#### **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-CastMetal Hand Washing Faucet with the following features:

- Solenoid housed in removable carrier that includes supply strainer
- Integral water supply shut off
- Supply strainer serviceable from above deck
- Vandal resistant spray insert, key housed inside faucet body
- All electronics sealed to IP-71
- Gold plated electrical contacts
- Above deck individual diagnostic indicators for battery life, solenoid condition, and power-up mode
- Flexible, high pressure supply hoses, 3/8" compression connections
- Bi-stable magnetic solenoid
- Four (4) "AA" alkaline batteries
- Double infrared sensors with automatic setting feature
- Integral 4-inch base
- Includes all mounting hardware
- Line Purge mode, eliminates stagnant water
- Standard Bowed Crown

## **VIDEOS**




BASYS® Faucet Installation and Features

## **DOWNLOADS**

- EFX 3Xx/6Xx Active IR Installation Instructions
- EFX 3Xx/6Xx Active IR (SP) Installation Instructions
- EFX 3Xx/6Xx Capacitance Installation Instructions
- EFX 3Xx/6Xx (SP) Installation Instructions
- Trim Plates Repair and Maintenance Guide
- IR FAQs Repair and Maintenance Guide
- IR FAQs SP Repair and Maintenance Guide





## **COMPLIANCES & CERTIFICATIONS**







(ADA Compliant, UL Certified, CEC Compliant, cUPC Low Lead Compliant)

## **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the EFX-600 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

#### WARRANTY

3 Year




EFX-600-HLP-BDT-CP-1.5GPM-MLM-IR-FCT (General Model Name: EFX600.203.0000 CP SENSOR FAUCET)

- EFX-6XX Repair and Maintenance Guide
- EFX-6XX IR Repair and Maintenance Guide
- Additional Downloads

\*One (1) faucet per battery pack

#### **ROUGH-IN**

# EFX-600.X0X.0000. Faucet with hot and cold water supply 1-3/16" 930 MM) 1 1/2" (38 MM) MIN. DIA. HOLE MAX. DECK THICKNESS REQUIRED RETAINER - NUT ADAPTER, w/28" CORD 13" (330 mm) BACK-UP LONG FLEX HOSE BATTERY PACK\* IF A CONNECTION TO SEPARATE HOT TEMPERED AND COLD WATER SUPPLIES IS DESIRED, SUPPLY THAN A BAK-CHEK TEE FITTING MUST BE USED PRIOR TO CONNECTING TO THE FAUCET.

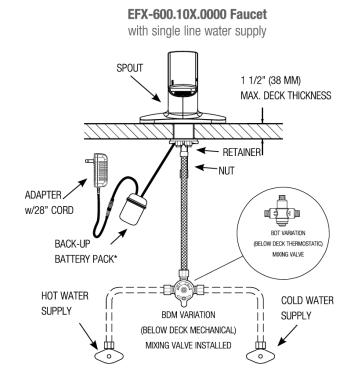

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com