

Air Delights

Automist Aerosol Dispenser

(802218)


Wall Mounting:

For permanent installation, position (included) screws over a wall stud and secure to wall. Double-stick tape is already affixed to the dispenser for use on a CLEAN non-porous surface. It is recommended to mount using the included screws.

CAUTION: DO NOT EXPOSE EYES TO FRONT OF SPRAY TIP WHEN CHANGING AEROSOL CAN.

Instructions:

- Open dispenser by pushing provided key into **Key Lock** (Fig. A) and pull cover forward. Dispenser cover is hinged at the bottom.
- Insert two D-Cell alkaline batteries into the battery compartment (Fig. C) at the top of the unit, making sure the positive (+) and negative (-) ends of the batteries are positioned properly.
 - Check LCD display making sure the dispenser is in the OFF mode prior to inserting can.
- **Setting Clock** – Press **MODE** (Fig. D) button until **CLOCK** appears in the bottom right corner, then press the hour and minute buttons until the current time appears.
- **Setting On/Off Time** – The unit will operate 24 hours a day unless programmed differently. Press **MODE** (Fig. D) until **START** appears. Then press **HOUR** (Fig. E) and **MIN** (Fig. F) until the desired start time is on the display. Repeat this procedure for the **STOP** function setting the desired stop time.
 - Keep in mind this is a 24 hour (Military time) clock. 7:00 pm will display 19:00.
- **Setting Spray Count** – The unit will display 3000 spray counts unless otherwise programmed. If a Microburst 9000 is used in the dispenser, press **HOUR** (Fig. E) until 9000 is shown. If a Microburst 3000 or Select Aerosol is being used, the dispenser should read 3000.
 - This function must be reset with each can or battery replacement. This is done by pressing the ON/OFF button when the **SPRAY** function is on the display.
- **Setting Spray Interval** The unit is preset at a 15 minute spray interval. All other intervals must be programmed. Press **MODE** (Fig. D) until **INTERVAL** appears, then press the **MIN** (Fig. F) button until the desired spray interval appears.
- **To activate the unit**, press the **ON/OFF** button (Fig. G). The LED indicator will flash green/red 3 times and the actuating arm will activate 1 time as system check. Close the cover making sure the **Key Lock** (Fig. A) is securely in the opening.
 - During normal operation:
 - Green LED blinks approximately every 5 seconds.
 - Red LED blinks to indicate it is time to replace the aerosol can.
 - No blinking lights indicate the need to replace batteries

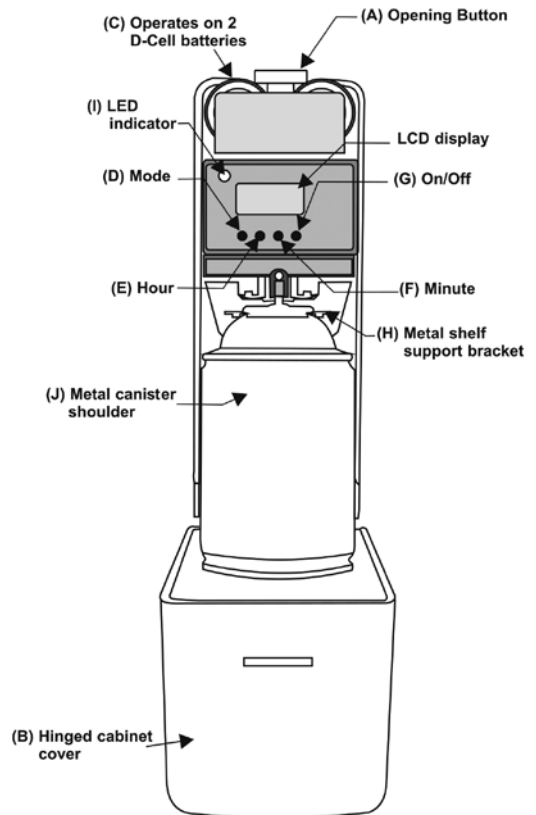

Air Delights Inc – 11170 SW 5th Street Ste 100 – Beaverton, OR 97005

Phone: 800-440-5556 or 503-352-1201

Fax: 503-643-8224

<http://www.airdelights.com/>