

**Mirror shelf with angle frame, welded corners, integral shelf and theft-resistant mounting:**

- ☐ **Standard Model 7805-1824 (18" x 24")**
- ☐ **Standard Model 7805-1836 (18" x 36") *Bradex***
- ☐ **Model 7805-XXXX (Specify width and height)**

### Product Materials

**FRAME:** one-piece, roll-formed stainless steel,  $\frac{3}{4}$ " x  $\frac{3}{4}$ " angle with corners welded, ground and polished smooth to a satin finish. Double strength continuous integral stiffener on all sides for added strength. Bevel on front of angle secures frame flush against mirror.

**BACK:** galvanized steel, secured to frame with concealed screws, equipped with integral horizontal hanging brackets.

**MIRROR:** first quality  $\frac{1}{4}$ " float glass, thermosetting infrared-cured paint backing with Poly-Glaze protective finish. Manufactured in accordance with ASTM C 1036 and ASTM C 1503. All edges protected by shock-absorbing, neoprene tubing. The back of the mirror is protected by a sheet of  $\frac{1}{4}$ " extruded polystyrene, which is placed between the mirror and the galvanized steel.

**SHELF:** 18 gauge stainless steel with exposed surfaces in architectural satin finish. Flanged front and side, welded to frame.

**SHELF BRACKETS:** 16 gauge stainless steel are provided on units exceeding 48" width.



### Optional Features

Features	Suffix
<input type="checkbox"/> $\frac{1}{4}$ " tempered glass mirror in lieu of polished float glass mirror*	-2
<input type="checkbox"/> Laminate glass	-3
<input type="checkbox"/> Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror	-4
<input type="checkbox"/> Bright annealed 20 gauge stainless steel in lieu of polished float glass mirror	-5
<input type="checkbox"/> Plexiglas®	-6

\*Either the Length (L) or the Width (W) must be greater than 25".

- ☒ An inherent characteristic of a manufacturing process for tempered glass is distortion which may vary from mirror to mirror.
- ☒ Stainless steel mirrors will differ in optic quality from glass mirrors.
- ☒ In larger sizes, stainless mirrors are subject to distortion and/or "oil canning" for which Bradley Corporation cannot accept responsibility.
- ☒ Bradley mirrors are not field interchangeable from horizontal to vertical or vice versa. **Always specify width first.**

### Installation

Verify all rough-in dimensions prior to installation. Secure concealed mounting bracket to wall with screws (not included) at holes provided. Mounting kits available through Bradley (ref. #899-026). Refer to technical data sheet #8880. Provide in-wall backing at mounting screw locations. Position mirror over mounting bracket to engage hanger tabs. Slide mirror down and lock into position.

**Washroom Accessories**  
**Document No. 8780**

### Guide Specification

Mirror shall be framed with heavy gauge, one-piece, roll-formed,  $\frac{3}{4}$ " x  $\frac{3}{4}$ " stainless steel angle with double strength continuous integral stiffener. Welded corners shall be polished to a uniform satin finish. Integral 18 gauge stainless steel shelf shall have front and side flanges. Mirror shall be of first quality  $\frac{1}{4}$ " float glass guaranteed for 15 years against silver spoilage and protected by a shock-absorbing, neoprene tubing with Poly-Glaze protective finish. Back of unit shall be galvanized steel secured to frame with concealed screws, equipped with integral horizontal hanging brackets and separate wall hanger for concealed mounting.

**Framed Mirror and Shelf shall be Bradley Model 7805-\_\_\_\_\_ " W x \_\_\_\_\_ " H (specify width and height).**

### ADA Compliant


- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



© 2012 Bradley  
P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone: 800.BRADLEY (800.272.3539) Fax: 262.253.4161  
bradleycorp.com

### Dimensions

#### MIRRORS 30" WIDE AND UNDER

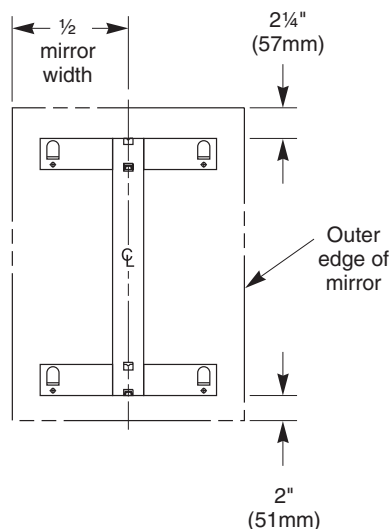

#### MIRRORS OVER 30" WIDE

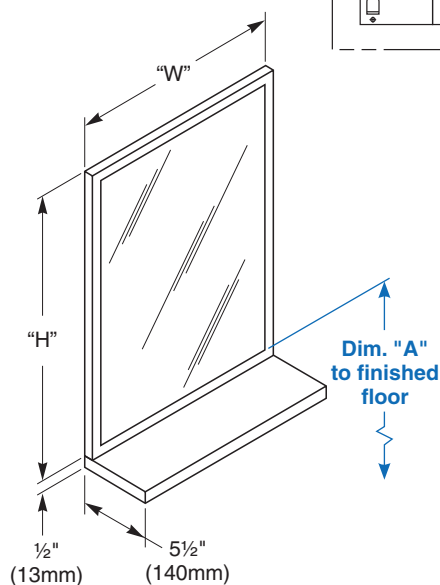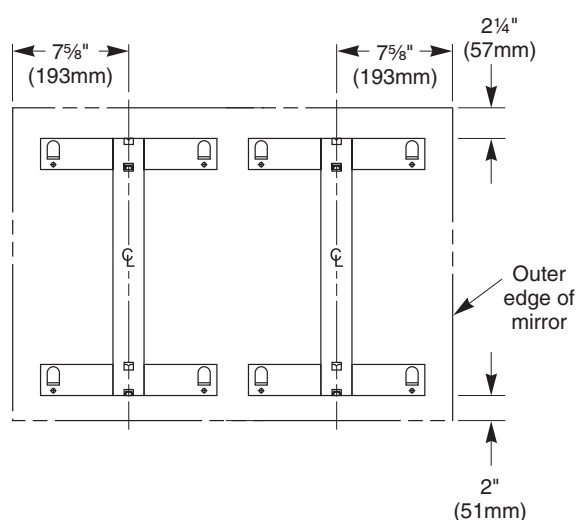

### Bradex® Models

Width (Inches) W	Height (Inches) H	Overall Dimension (Inches)	Overall Dimensions (Millimeters)	Standard Model Number
18"	36"	18 x 36	457 x 914	7805-1836

Model 7805 series angle framed mirrors can be fabricated to fit a maximum size of 96"W x 60"H.

Dim. "A" Key Surface:	For Dim. "A"	Bottom of Unit
Mirror's bottom edge of the reflecting surface to finished floor	40" (1016mm)	38 3/4" (984mm)
	37" (940mm)	35 3/4" (908mm)
	34" (864mm)	32 3/4" (832mm)
Rough wall opening:		
Surface Mount:	No rough wall opening, see overall dimensions	

Washroom Accessories  
Document No. 8780

Orders composed of products indicated as **Bradex®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

© 2012 Bradley  
P.O. Box 309, Menomonee Falls, WI 53052-0309  
Phone: 800.BRADLEY (800.272.3539) Fax: 262.253.4161  
bradleycorp.com