

- Exceeds American National Standard Z358.1 Specifications
- Exceeds European EN 15154-1
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- Listed by Intertek to EN 15154-1



Specifications


This unit is made specifically for areas subject to freezing. Compact drench shower fits easily into any work environment. Shower valve operates quickly by a stainless steel push flag handle. Shower provides a superior washdown with a more even spray pattern.

This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.


Model	Description
<input type="checkbox"/> S19-120HFP	Frost-Proof Wall-Mounted Drench Shower
<input type="checkbox"/> S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve

Recommended Option:
Navigator S19-2100 EFX25
Emergency Thermostatic Mixing Valve

NAVIGATOR




Satisfies ANSI Z358.1
tepid water requirements.

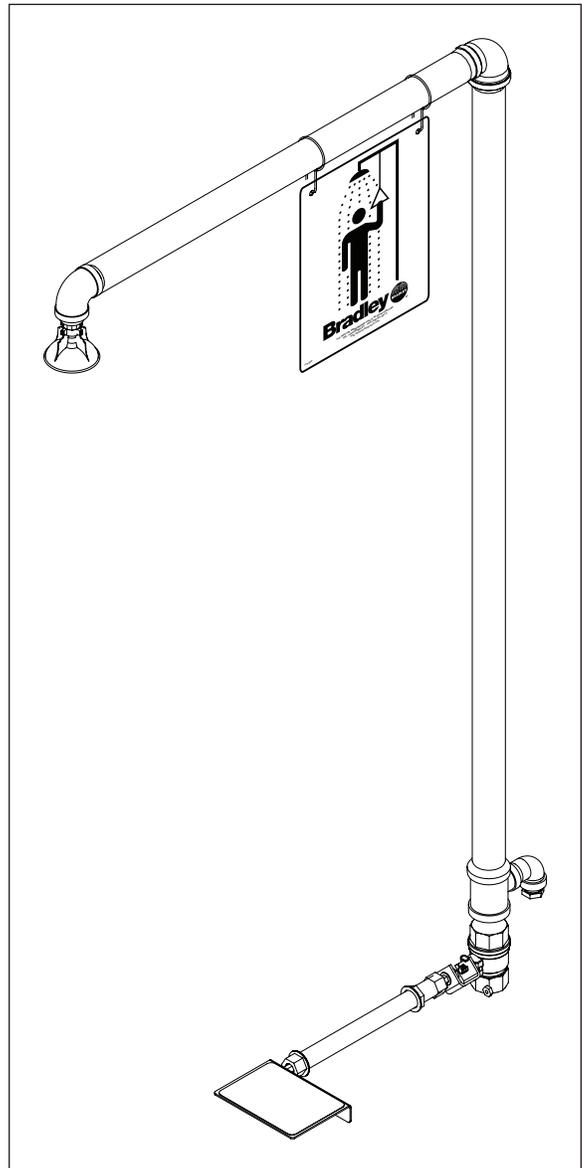

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

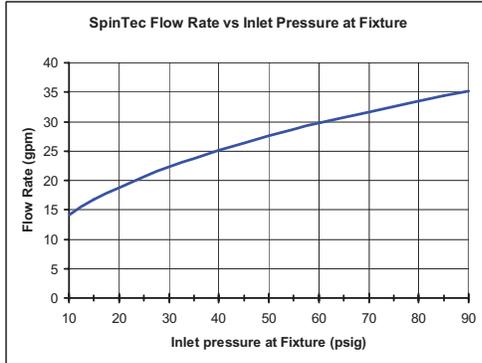

Frost-Proof Shower Valve

Chrome-plated brass 1" NPT stay-open valve. Hand operated by a stainless steel push handle. Standard depth 36" (914mm). Special order for other bury depths (18", 48", 60", 72").



Special order depths are non-returnable.

Pipe and Fittings

1" galvanized steel with BradTect® safety yellow coating. Standard wall thickness is 8"-12". Special order for other wall thicknesses. (0"-8" or 12"-18").

Water Supply

1" NPT.

