

Chrome-Plated Brass Drench Shower w/Horizontal Supply

- Exceeds American National Standard Z358.1 Specifications
- Exceeds European EN 15154-1
- · Bright Mirror Finish
- · Chrome-Plated Red Brass Pipe and Fittings
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- SpinTec[™] showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1
- . Listed by Intertek to EN 15154-1

Specifications

Impact-resistant plastic showerhead with corrosion-resistant stainless steel shroud. Bright mirror finish is superior for labratory use where appearance is important. Shower pull rod is stainless steel. Pipe and fittings are chrome-plated red brass. Shower provides a superior washdown with a more even spray pattern.



Drench shower is designed to accommodate standard 8' ceiling height. ANSI Z358.1 compliant drench showers are mounted between 82"–96" from the lower edge of the showerhead or shroud to the floor.




This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.







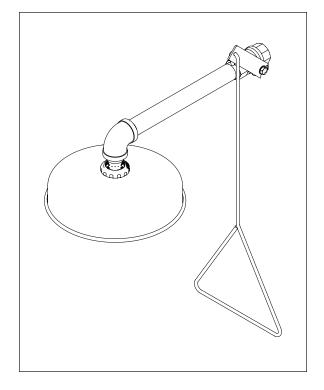

Model	Description
□ \$19-120T	Chrome-Plated Brass Drench Shower w/Horizontal Supply
□ S19-2100	Navigator EFX25 - Emergency Thermostatic Mixing Valve




Chrome-Plated Brass Drench Shower w/Horizontal Supply

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter yellow impact-resistant plastic; includes 1034" (273mm) diameter corrosion-resistant stainless steel shroud. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

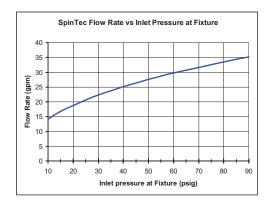

Valve

Chrome-plated brass 1" NPT stay-open valve. Operated by a stainless steel pull rod with triangular handle.

Pipe and Fittings

Chrome-plated red brass.

Water Supply

1" NPT Horizontal.

