

BASYS® SENSOR FAUCET EFX-200-4-HLP-ISM-CP-1.5GPM-AER-IR-FCT

(General Model Name: EFX200.502.0100)

CODE NUMBER

3324231

DESCRIPTION

4" Trim Plate, Hardwired Less Plug Power Supply, Integrated Side Mixer, Polished Chrome Finish, 1.5 gpm, Aerated Spray, Infrared Sensor, BASYS® Hardwired-Powered Deck-Mounted Mid Body Faucet.

DETAILS

• Flow Rate: 1.5 gpm (6 Lpm) (1.5GPM)

Spray Type: Aerated (AER)
Sensor Type: Infrared (IR)
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)

Power Supply: Hardwired Less Plug (HLP)
 Temperature Mixer: Integrated Side Mixer (ISM)

Finish: Polished Chrome (CP)
Factory Default Timeout: 10s

• Factory Default GPC: 0.75

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-CastMetal Hand Washing Faucet with the following features:

- · One tool service
- All wetted components to be stainless steel, engineered thermoplastic, EPDM, and copper or copper alloy
- Solenoid housed in removable carrier that includes supply strainer
- Integral water supply shut off
- Supply strainer serviceable from above deck
- Vandal resistant spray insert, key housed inside faucet body
- All electronics sealed to IP-144
- Gold plated electrical contacts
- Above deck individual diagnostic indicators for battery life, solenoid condition, and power up mode
- Flexible, high pressure supply hoses, 3/8" compression connections
- Bi-stable magnetic solenoid
- Four (4) "AA" alkaline batteries
- Double infrared sensors with automatic setting feature Includes all mounting hardware
- Line purge mode, eliminates stagnant water
- Adjustable time-outs
- Standard Bowed Crown


VIDEOS


BASYS® Faucet Installation and Features

BASYS® Faucet Installation Mid Height Model

DOWNLOADS

- EFX 1Xx/2Xx Installation Instructions
- EFX 1Xx/2Xx (SP) Installation Instructions
- EFX 1Xx/2Xx Caddy Replacement Installation Instructions

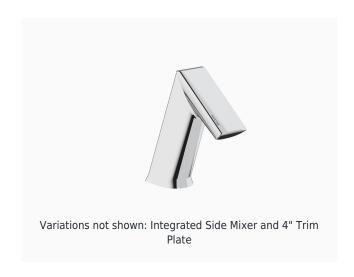



COMPLIANCES & CERTIFICATIONS







(ADA Compliant, UL Certified, CEC Compliant, cUPC Low Lead Compliant)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the EFX-200 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.



BASYS® SENSOR FAUCET EFX-200-4-HLP-ISM-CP-1.5GPM-AER-IR-FCT

(General Model Name: EFX200.502.0100)

- Trim Plates Repair and Maintenance Guide
- IR FAQs Repair and Maintenance Guide
- IR FAQs SP Repair and Maintenance Guide
- EFX-2XX Repair and Maintenance Guide
- Additional Downloads

ROUGH-IN

EFX-200.00X.0X1X Faucet with Single Line Water Supply

ADAPTER W
28" CORD

13" (330 mm)

MIN DIA HOLE

REQUIRED

1.1/2" (38 mm)

MAX DECK

THICKNESS

NUT

ADAPTER W
28" CORD


13" (330 mm)

LONG FLEX HOSE

If a connection to separate hot and cold water supplies is desired, then a Bak-Chek" tee fitting (not supplied) must be used prior to connecting to the faucet.

EFX-200.50X.0X1X Faucet

with Hot & Cold Water Supply



WARRANTY

3 Year

Electrical Connection for up to 6 FaucetsCan combine up to six (6) faucets using one adapter

