EFX-280-TUR-ISM-CP-0.5GPM-MLM-IR-FCT

(General Model Name: EFX280.500.0000 Turbine)

CODE NUMBER

3324369

DESCRIPTION

Turbine Power Supply, Integrated Side Mixer, Polished Chrome Finish, 0.5 gpm, Multi-Laminar Spray, Infrared Sensor, BASYS® Turbine-Powered Deck-Mounted Mid Body Faucet.

DETAILS

- Flow Rate: 0.5 gpm (2 Lpm) (0.5GPM)
- Spray Type: Multi-Laminar (MLM)
- Sensor Type: Infrared (IR)
- Mounting Type: Single Hole
- Power Supply: Turbine (TUR)
- Temperature Mixer: Integrated Side Mixer (ISM)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 10s
- Factory Default GPC: 0.083

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-CastMetal Hand Washing Faucet with the following features:

- One tool service
- All wetted components to be stainless steel, engineered thermoplastic, EPDM, and copper or copper alloy
- Solenoid housed in removable carrier that includes supply strainer
- Integral water supply shut off
- Supply strainer serviceable from above deck
- Vandal resistant spray insert, key housed inside faucet body
- All electronics sealed to IP-231
- Gold plated electrical contacts
- Above deck individual diagnostic indicators for battery life, solenoid condition, and power up mode
- Flexible, high pressure supply hoses, 3/8" compression connections
- Bi-stable magnetic solenoid
- Four (4) "AA" alkaline batteries
- Double infrared sensors with automatic setting feature Includes all mounting hardware
- Line purge mode, eliminates stagnant water
- Adjustable time-outs
- Standard Bowed Crown
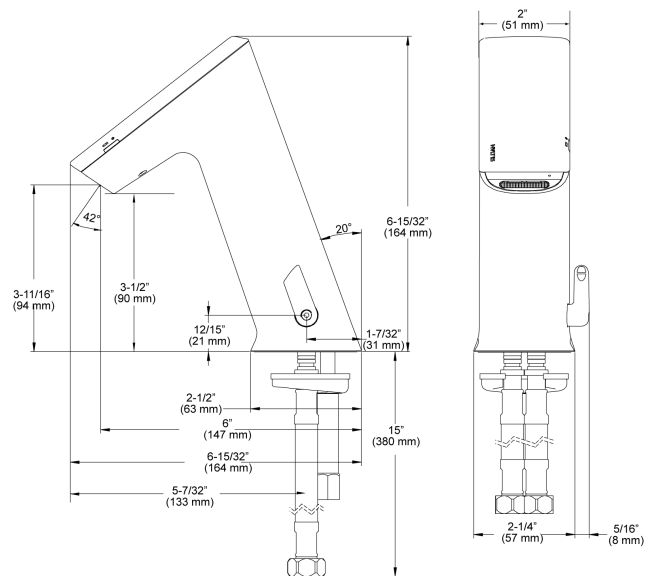
ELECTRICAL SPECIFICATIONS

- Battery Life: 3 years
- Self-Adjustment Range: 1"–6" (25–152mm)
- Sensor Range: 4"–5" (102–127mm)

VIDEOS

- ▶ BASYS® Faucet Installation and Features
- ▶ BASYS® Faucet Installation Mid Height Model

Variation not shown: Integrated Side Mixer

COMPLIANCES & CERTIFICATIONS

(ADA Compliant, UL Certified, CEC Compliant, CalGreen Compliant, GPC 0.25 or less, cUPC Low Lead Compliant)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the EFX-280 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet.
Find a compatible sink for this faucet.

WARRANTY
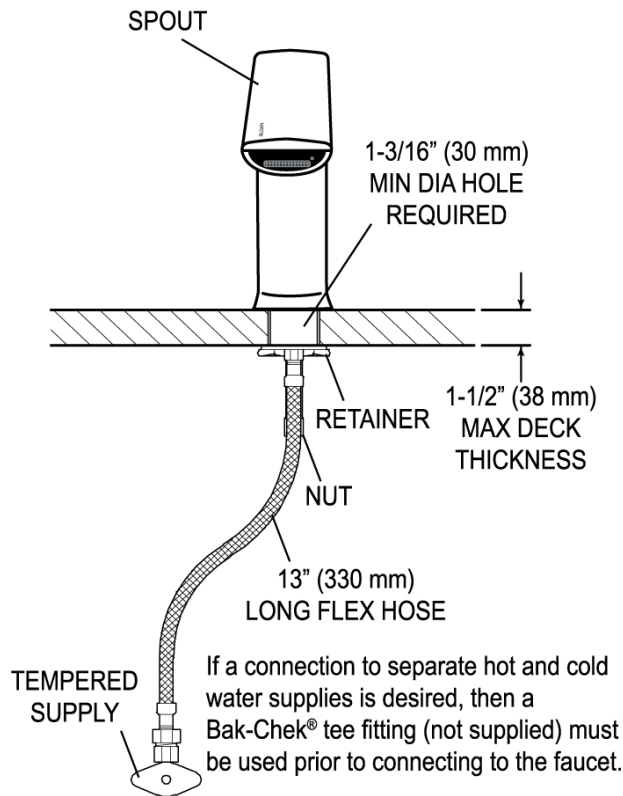
3 Year

DOWNLOADS

- EFX 1Xx/2Xx (SP) Installation Instructions
- EFX 1Xx/2Xx Installation Instructions
- EFX 1Xx/2Xx Caddy Replacement Installation Instructions
- EFX-2XX Repair and Maintenance Guide
- Trim Plates Repair and Maintenance Guide
- Additional Downloads

ROUGH-IN

EFX-280.00X.0X0X Faucet
with Single Line Water Supply

SPOUT
1-3/16" (30 mm) MIN DIA HOLE REQUIRED
1-1/2" (38 mm) MAX DECK THICKNESS
RETAINER
NUT
13" (330 mm) LONG FLEX HOSE
TEMPERED SUPPLY
If a connection to separate hot and cold water supplies is desired, then a Bak-Chek® tee fitting (not supplied) must be used prior to connecting to the faucet.

EFX-280.50X.0X0X Faucet
with Hot & Cold Water Supply

SPOUT
1-3/16" (30 mm) MIN DIA HOLE REQUIRED
INTEGRAL SIDE MIXER LEVER (Can be set and removed)
1-1/2" (38 mm) MAX DECK THICKNESS
RETAINER
NUT
13" (330 mm) LONG FLEX HOSE
HOT SUPPLY
COLD SUPPLY