



Regal® 115/116 XL Flushometer



Models Available

Regal 115 XL

Regal 116 XL

Description

Exposed Water Closet Flushometer, for floor mounted or wall hung top spud bowls.

Flush Cycle

Model 115 Water Saver (3.5 gpf/13.2 Lpf)

Model 115-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

Model 116 Water Saver (3.5 gpf/13.2 Lpf)

Model 116-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Closet Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 1" I.P.S. Screwdriver Bak-Chek™ Angle Stop
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Adjustable Tailpiece
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling and Spud Flange for 1½" Top Spud
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX™ Rubber Compound for Chloramine Resistance


Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

Accessories

See Accessories Section of the Sloan catalog for available accessories

Fixtures

Consult Sloan for Sloan brand matching fixture options.

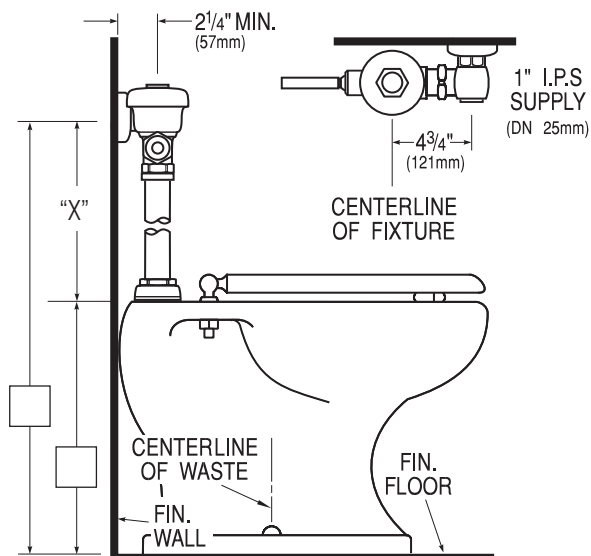

Listed by I.A.P.M.O.



This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN

Air Delights

10500 SEYMOUR AVE. - FRANKLIN PARK, IL 60131

11170 SW 5TH STREET, SUITE 100 - BEAVERTON, OR 97005

PHONE: 1-800-9-VALVE-9 - FAX: 1-800-447-8329

PHONE: 1-800-440-5556 - FAX: 1-503-643-8224

<http://www.sloanvalve.com>

<http://www.airdelights.com> - Customer_Service@AirDelights.com