

# Regal® 186 XL

## Flushometer



### Models Available

- ☑ Regal 186 XL
- Regal 186 XL-XV Less Flush Connection

### Description

Exposed Urinal Flushometer, for 3/4" top spud urinals.

### Flush Cycle

- ☑ Model 186-1.0 Low Consumption (1.0 gpf/3.8 Lpf)
- ☑ Model 186 Water Saver (1.5 gpf/5.7 Lpf)

### Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 3/4" I.P.S. Screwdriver Bak-Chek™ Angle Stop
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Adjustable Tailpiece
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling Wall and Spud Flange for 3/4" Top Spud
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX™ Rubber Compound for Chloramine Resistance


Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

### Accessories

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

### Fixtures

Consult Sloan for Sloan brand matching fixture options.

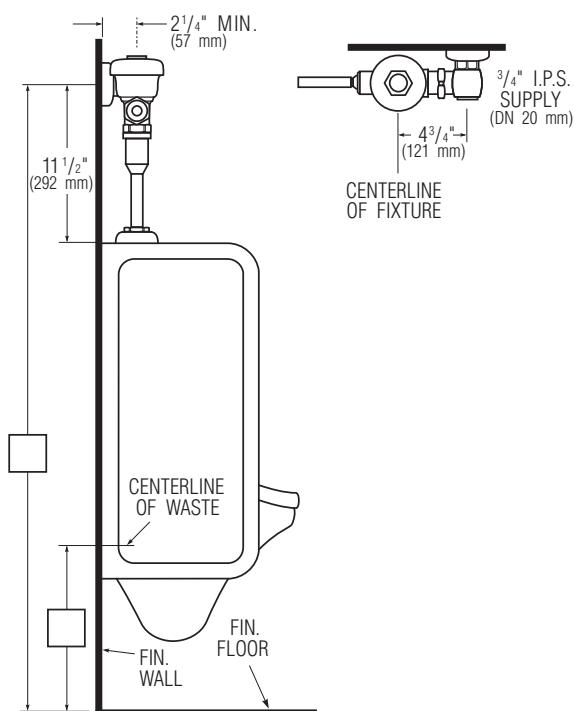

Listed by I.A.P.M.O.



This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.