Dolphin® Model Flushometer 120 120-1.6

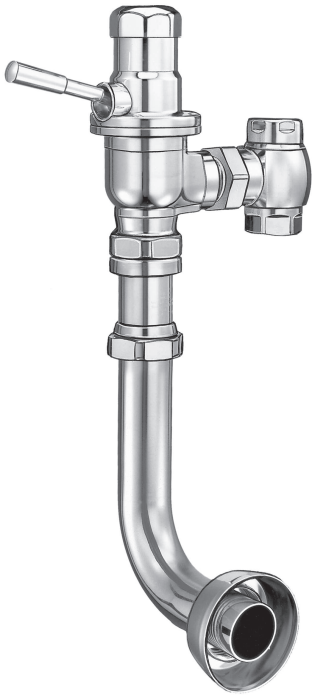

Description

Exposed Water Closet Flushometer, for floor mounted 1½" exposed back spud bowls. Specifically engineered for salt water and severe water conditions.

Flush Cycle

Model 120 (factory set at 3.5 gpf/13.2 Lpf)
Model 120-1.6 (factory set at 1.6 gpf/6.0 Lpf)
Valve Adjustment Range: 0.5 gpf/1.9 Lpf to 16.0 gpf/60.6 Lpf
Factory settings made at 40 psi (275 kPa) — flush volume will vary with pressure and flow rate

Specifications

Quiet, Exposed, Chrome Plated Closet Flushometer with the following features:

- Metal Lever Handle
- 1" I.P.S. Screwdriver Bak-Chek™ Angle Stop
- Vandal Resistant Stop Cap
- Adjustable Tailpiece
- Vacuum Breaker Flush Connection
- Spud Coupling and Flange for 1½" Back Spud
- Flushometer does not require water pressure to positively shut off
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Handle Packing, Stop Seat and Vacuum Breaker to be Molded from PERMEX™ Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037.

Variations

☒	GJ	Ground Joint Stop
☒	K	Wheel Handle Stop
☒	U	1¼" Flush Connection and Spud Coupling
☒	YB	Sweat Solder Adapter Kit
☒	YBYC	Sweat Solder Adapter & Cast Set Screw Wall Flange
☒	YG	Extended Bumper on Angle Stop (for seat with cover)
☒	YO	Bumper on Angle Stop (for open front seat without cover)
☒	XYV	Less Vacuum Breaker

NOTE: Bak-Chek Angle Stop available with 1" Whitworth Thread (please specify). Ground Joint Stop (GJ) recommended for salt water applications. Vacuum Breaker usually not required when used with non-potable water (specify XYV Variation).

Accessories

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

Made In The USA

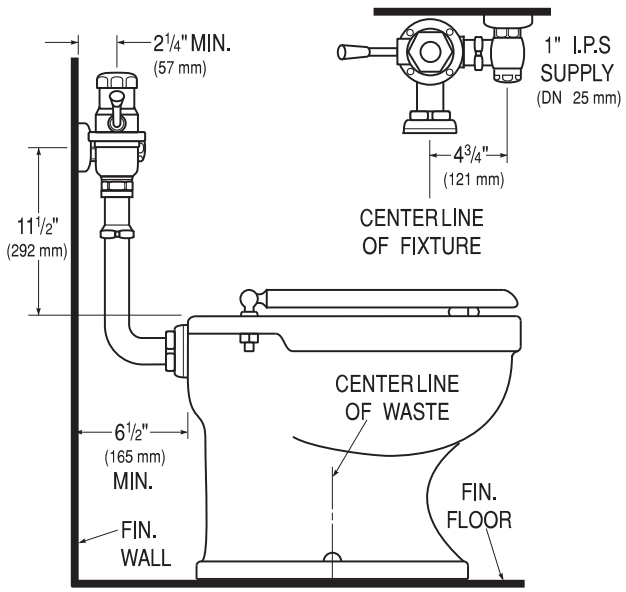

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN
10500 SEYMOUR AVE. - FRANKLIN PARK, IL 60131
PHONE: 1-800-9-VALVE-9 - FAX: 1-800-447-8329
http://www.sloanvalve.com

Air Delights
11170 SW 5TH STREET, SUITE 100 - BEAVERTON, OR 97005
PHONE: 1-800-440-5556 - FAX: 1-503-643-8224
http://www.airdelights.com - Customer_Service@AirDelights.com

Dolphin 120 S.S. — Rev. 1b (10/11)
Copyright © 2011 SLOAN VALVE COMPANY