TES

Drawn:

JBC

Checked:

JRM

Approved:

JHB

Date:

08/01/17

Scale:

1:4

Sheet: 1 of 2

T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

017493-45

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

, , , , , , , , , , , , , , , , , , ,	• •		
		This Space for Architect/Engineer Approval	
		Job Name	Date
		Model Specified	Quantity
		Customer/Wholesaler	
		Contractor	
	Water Resistant Faucet Sensor Cable Connection (Remove Rubber Cap to Connect Cable)		1 13/16" [46mm]
3/8 NPSM Male Manual Bypass			1 1/16"
Outlet—	1/2" NPSM Male		[27mm]
Removable Strainer	Controlled Outlet		Battery Storage Compartment Access Cover
Mixed Water Tee Fitting with Integral Strainer			2" [51mm]
1/2" NPSM Female Inlet 360 °Swivel Coupling Nut	\hat{\text{\tin}\text{\tint{\text{\tin}\text{\texi}\text{\text{\text{\text{\text{\text{\text{\text{\text{\text{\ti}}\\ \tittt{\text{\text{\text{\texi}\text{\text{\text{\texi}\text{\text{\text{\texi}\text{\texi}\tilitht{\text{\texit{\text{\tet{\text{\texi}\text{\text{\texi}\tint{\text{\texi}\texit{\t	NIV DEALINE	2" [51mm]
Integral Inlet Stop	SAL		
3 5/8" x 4 3/16" x 2" Deep [92mm x 106mm x 51mm] Control Module Box (Blue), AC or DC Operated w/ (4) AA Batteries. Hardwire Cable Using Terminals on Bac (EC-HARDWIRE Required & Sold Separately)	ck	3 7/16" [88mm]	ON/OFF Button
Water Resistant Transformer Cable Connection Port (Remove Rubber Plug to Connect Cable)			
Product Specifications:	I Madula with Internal Flore Or	Product Cor	mpliance:
ChekPoint Sensor Faucet Contro Switches & Manual Bypass Tee (NSF 61 - Se	ection 9 ow Lead Content)

T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690

Model No.

017493-45

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

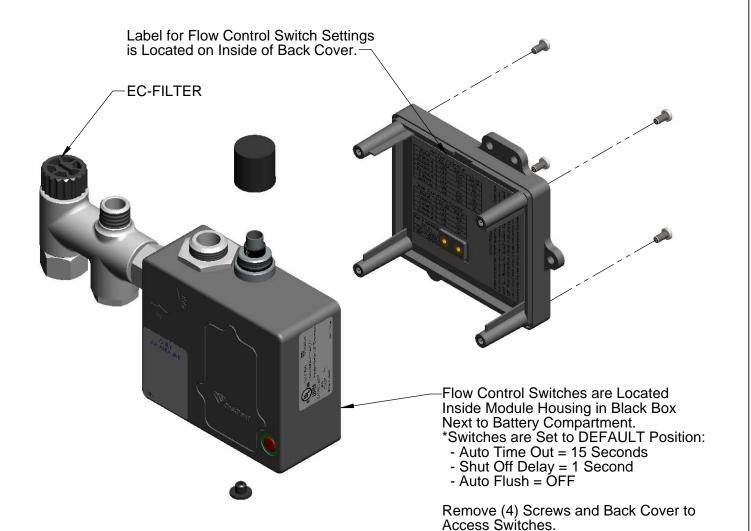

*Available Water Flow Control Selections:

- Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
- Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
- Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

Product Specifications:

ChekPoint Sensor Faucet Control Module with Internal Flow Control Setting Switches & Manual Bypass Tee (Blue Module Housing)

Product Compliance:

UL 1951

NSF 61 - Section 9 NSF 372 (Low Lead Content)

Drawn: **JBC** Checked: JRM Approved: JHB Date: 08/01/17 Scale: NTS Sheet: 2 of 2