

# AutoFlush® New and Improved with Visual Indicators (LED's)

For Sloan and Zum  
Flush Valves

- 400938 Urinal-White
- 400939 Toilet-White
- 401186 Urinal-Chrome  
Finish
- 401187 Toilet-Chrome  
Finish

For Coyne & Delany  
Flushboy Valves

- 401194 Urinal-White
- 401195 Toilet-White
- 401207 Urinal-Chrome  
Finish
- 401206 Toilet-Chrome  
Finish

## Retrofit Automatic Flushing Unit

No need to replace your current investment of flush valves or move plumbing rough-in to accommodate ADA compliance. Installing battery operated automatic flushing device onto your existing flush valves makes economic sense. Installation of the AutoFlush® Unit is quick and simple—you don't even have to turn the water off. The AutoFlush® is the easiest and most cost effective way to gain the benefits of an automatic flushing system—No more unflushed fixtures, foul odors, and valve damage from handle kicking.

### New Improved Design


New angled sensor allows for user detection even with the toilet seat in the raised position.

### Smart Technology

The AutoFlush® infrared *Object Lock Technology* ensures dependable activation flushing like no other system today. The use of cam gears instead of solenoid valves provides dependable trouble-free operation.

### Easy 2 Minute Retrofit Installation


No water shut off required. Simply remove your existing flush handle with the supplied wrench, replace with your new AutoFlush® unit, and tighten the collar nut with the same wrench. Insert supplied batteries, and you have just converted your washroom to a higher standard in hygiene.

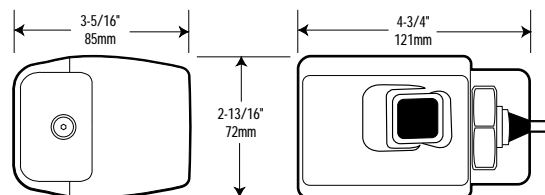


Case Pack: 6  
Case Weight: 14 lbs.  
Case Cube: 1.00

## SANITARY NO TOUCH OPERATION


A) User Approaches

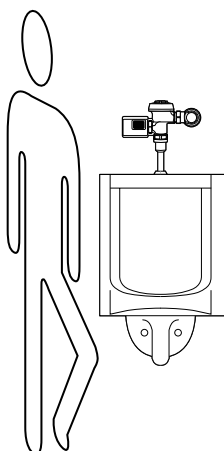


B) Object Lock  
Infrared  
Senses  
User

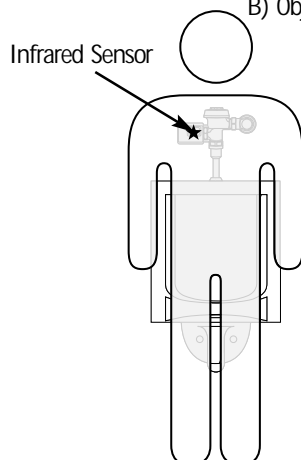

C) Fixture is Flushed  
as User Walks  
Away

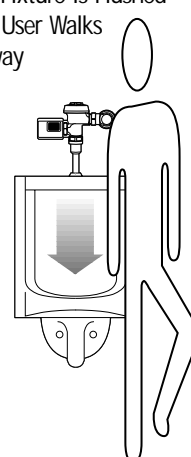

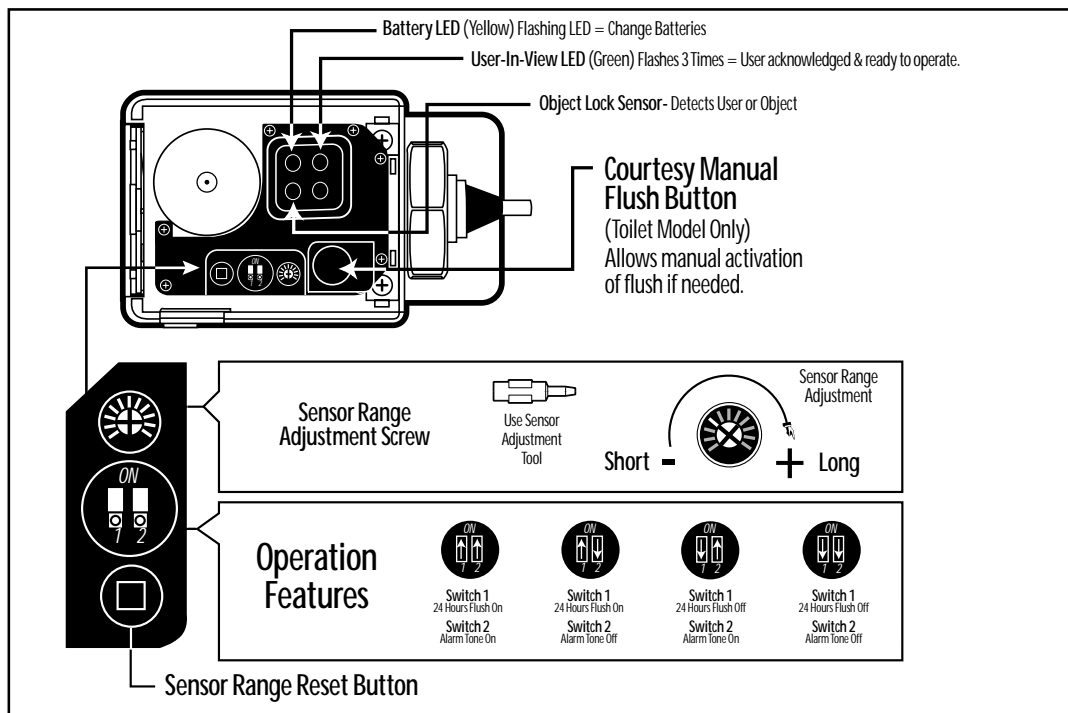

## Specifications

### Product:

AutoFlush® unit, right-hand or left-hand valve, retrofitting.

### Trap Seal Protection (24hr flush):

Ensures fixtures are flushed at least once every 24 hours. This feature prevents sewer gases escaping through open trap. This feature can be turned off by placing switch #1 in the down position.

### Valve Type:

Retrofits to all Sloan Royal and Zurn flush valve systems, or Coyne and Delany flushboy valves. Adaptable for both left and right hand supply. Works with toilets & urinals.

### Flush Volume:

Operates with any flush volume cycle.

### Power Supply:

4 C- Cell alkaline batteries - Included! Average 3+ years battery life under normal operation.

### Sensor Type:

Infrared convergence type object lock detection. Adjustable range: 8" to 48." (32" factory set)

### User In View L.E.D.:

Green light flashes 3 times when user is detected for 5 seconds.

### Battery Replacement L.E.D.:

Yellow light flashes when batteries are low.

### Battery Replacement Tone:

Optional audio tone reinforces yellow LED (change batteries). This feature can be turned off by placing switch #2 in the down position.

### Installation Time

Easy 2 minute installation. Water does not need to be shut off.

### Compliance:

Designed to meet A.D.A. requirements.

### Warranty:

3 years against defects in parts and workmanship. Successfully tested for over 1 million flushes!

### High Mount Adapter:


Angles AutoFlush® unit down 27.5° (part # 401096).

### Allen Wrench:

3mm / 1/8" Allen wrench - Included.

### Courtesy Manual Flush:

Toilet model only.



# Air Delights

[www.airdelights.com](http://www.airdelights.com)

11170 SW 5th Street, Suite 100

Beaverton, OR 97005

Toll Free: 1-800-440-5556