

For Commercial Applications

Job Name _____
 Job Location _____
 Engineer _____
 Approval _____

Contractor _____
 Approval _____
 Contractor's P.O. No. _____
 Representative _____

Series B-3110

Class 150 Bronze Gate Valves, Threaded Ends

Sizes: 1/2"-2" (15-50mm)

Watts Series B-3110 Class 150 Bronze Gate valves comply with MSS-SP-80 Type 1 and feature a union bonnet, rising stem and solid wedge disc.

Features:

- Union Bonnet
- Rising Stem
- Solid Wedge Disc
- 1/2"-2" (15-50mm) threaded end connections (ANSI/ASME B1.20.1)

Pressure — Temperature:

- 150psi WSP to 366°F (186°C)
- 300psi WOG non-shock



Materials List


NO.	DESCRIPTION	MATERIAL	ASTM SPEC
1	Body	Bronze	ASTM B62
2	Bonnet	Bronze	ASTM B62
3	Stem	Bronze	ASTM B62
4	Disc	Bronze	ASTM B62
5	Packing Nut	Brass	ASTM B283, C3770
6	Gland	Brass	ASTM B16
7	Gland Packing	Aramid w/Graphite	Commercial
8	Hand Wheel (1/2"-1")	Zinc	ASTM B86
	(1 1/4"-2")	Aluminum	ASTM B85
9	Wheel Nut	Brass	ASTM B16
10	Bonnet Ring	Bronze	ASTM B62
11	Name Plate	Aluminum	Commercial

Specifications

Valve shall be manufactured out of Class 150 bronze and comply with MSS-SP-80, Type 1. Valve shall be pressure rated to 150psi WSP, 300psi WOG non-shock and have threaded ends. Valve shall have a union bonnet, rising stem and solid wedge disc. Valve shall be a Watts Regulator Company Series B-3110.

Dimensions — Weights

Size	Ordering Code	A		C		K		Weight	
		End-to-End				Diameter of Handle		lb.	kg.
in.	mm.	in.	mm.	in.	mm.	in.	mm.		
1/2	15 0106061	2	51	5 3/8	136	2 3/16	56	1.1	.5
3/4	20 0106062	2 3/16	56	6 3/16	157	2 3/4	70	1.6	.7
1	25 0106063	2 5/8	67	7 1/16	179	2 3/4	70	2.5	1.1
1 1/4	32 0106064	2 11/16	68	8 1/2	216	3 1/8	79	3.5	1.6
1 1/2	40 0106065	2 15/16	75	10 1/8	257	3 9/16	90	4.8	2.2
2	50 0106066	3 5/16	84	11 5/8	295	3 15/16	100	7.3	3.3

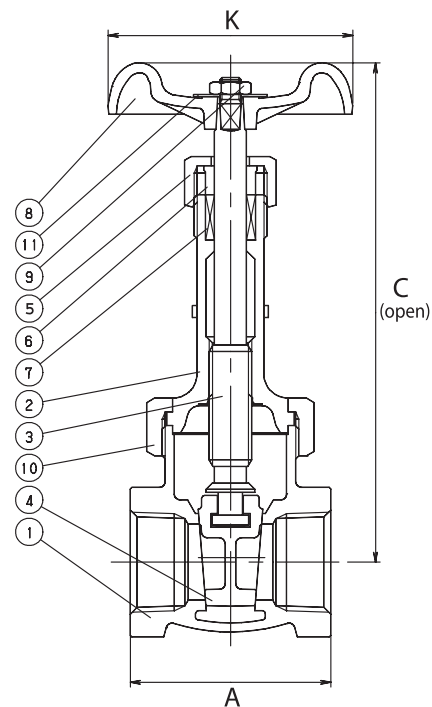

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.



USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscda.com

