

- Specify color _____
(See color chart in back of catalog)
- Model 3258 — Recessed
- Model 3258-10 — Semi-Recessed
(recesses 2", projects 2")
- Model 3258-11 — Surface-Mounted
(projects 4")
- Accent Series — Color Laminate
- 2.8-Gallon Capacity

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

DOOR: 5/16" thick solid laminate, made of colored Melamine bonded under high pressure to a phenolic core. All exposed edges are machined smooth to a uniform dark finish. Attached to cabinet with full-length, heavy-duty stainless steel piano hinge. Equipped with a latch. Tumbler lock optional.

WASTE RECEPTACLE INSERT: leakproof molded plastic.

PUSH FLAP DOOR: same material as cabinet door. Heavy-duty stainless steel piano hinge.



Capacity

2.8 gal. (0.37 cu. ft.)

Operation

Waste receptacle insert removable by unlocking cabinet door.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 12 3/4"W x 26 3/8"H x 4"D (semi-recessed unit only 2" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed waste receptacle shall be fabricated of heavy gauge stainless steel. Cabinet door of 5/16" thick solid laminate with full-length piano hinge and secured by a latch. Removable 2.8 gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 14 1/4"W x 28 1/4"H x 4"D.

Optional Features


Feature	Suffix
<input type="checkbox"/> Tumbler Locks	-15

ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

Washroom Accessories
Document No. 8290

Dimensions

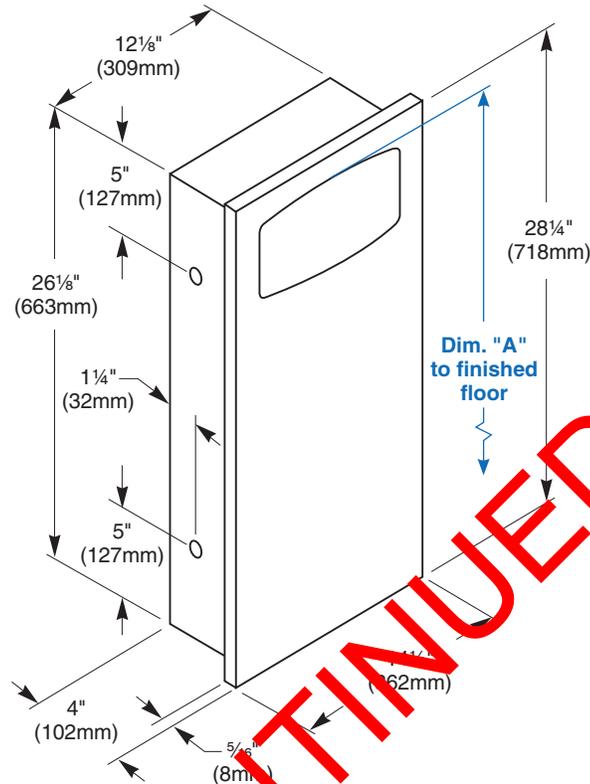

DISCONTINUED

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Top of door (5½" door opening) to finished floor	48" (1219mm)	49" (1245mm)	22¾" (568mm)
	45" (1130mm)	46" (1168mm)	19¾" (492mm)
	42" (1067mm)	43" (1092mm)	16¾" (416mm)
	40" (1016mm)	41" (1041mm)	14¾" (365mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	12½" (321mm) Wide x 26⅝" (677mm) High x 4" (102mm) Deep		
Semi-Recessed:	12½" (321mm) Wide x 26⅝" (677mm) High x 2" (51mm) Deep		

Washroom Accessories
Document No. 8290