




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 1200-V

ISSUED: 01/87

REVISED: 16 Oct 12

VINYL SHOWER CURTAIN

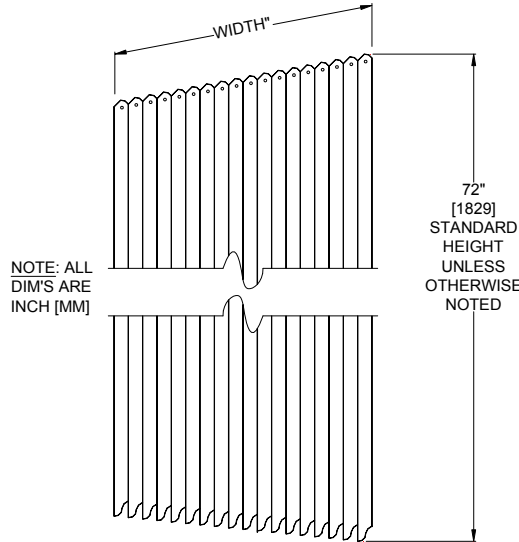

SPECIFICATION

Shower Curtain shall be fabricated of .008" (0,203) thick vinyl treated with Macrobiotic KV-33 anti-bacterial, anti-fungal and anti-mildew agent, and flame retardant agents. Protection agents shall remain in effect after repeated low-temperature mild soap washing and air-drying cycles. Top hem shall be 1-1/2" (38) wide, backing reinforced and heat-sealed above and below grommet row. Bottom hem and vertical edges shall be plain edge. Clear anodized aluminum grommets with 3/8" inside diameter (Ø9.5) shall be machined into top hem at 6-1/2" ± 1/2" (165 ± 13) intervals on centers starting at 1-1/4" ± 1/4" (32 ± 6) from edges. Color shall be white. Pattern is San Suede Pebble Emboss № SS9700. Vinyl curtain shall conform to Federal Specification L-C-780-A, L-C-780-A amendment 2, ASTM G-21-96 for fungal and mildew resistance and CID A-A-2398B.

Vinyl Shower Curtain shall be Model № 1200-Vxx (specify size per chart) of American Specialties, Inc., Yonkers, NY 10701-4913

INSTALLATION

For openings up to 36" (914) wide curtains should be specified an additional 6" (152) wider than opening and 12" (305) wider for openings exceeding 36" (914). Shower curtain should be attached with hooks (not provided, order separately) to rod (not provided, order separately). Curtain hooks Model № 1200-SHU are recommended.

<u>SIZE SPECIFICATION</u>					
OPENING	XX	OPENING	XX	OPENING	XX
36" (914)	42" (1067)	48" (1219)	60" (1524)	72" (1829)	84" (2134)
42" (1067)	60" (1524)	60" (1524)	72" (1829)		

<u>HOOKS COUNT (1200-SHU SUGGESTED) REQUIRED</u>					
CURTAIN WIDTH	HOOK COUNT	CURTAIN WIDTH	HOOK COUNT	CURTAIN WIDTH	HOOK COUNT
42" (1067)	7	60" (1524)	10	84" (2134)	14
		72" (1829)	12		