




The Fastest Way to Start Saving Water!

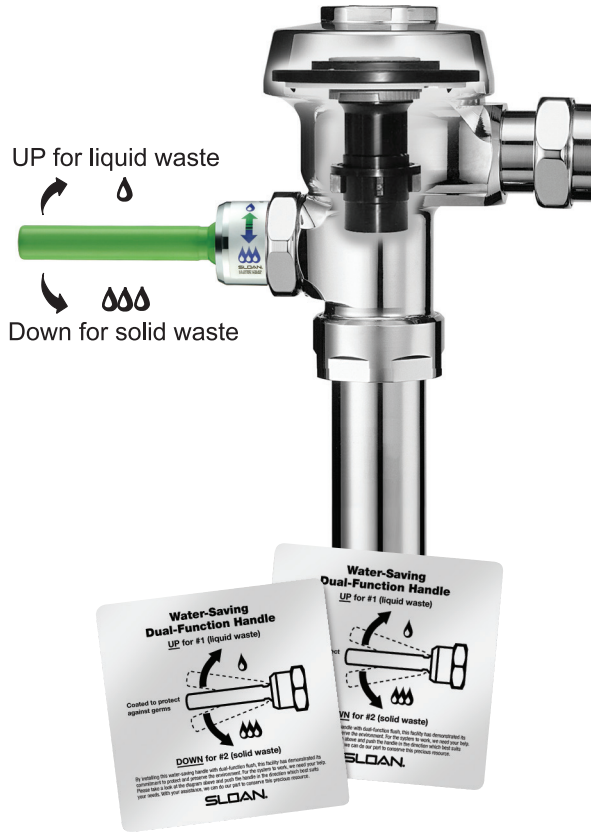

Water Conservation Tune-Up Kit

WES-213

Includes:

- Dual Flush Handle
- Diaphragm Kit

Description

Dual Flush Retrofit Handle and Dual Filtered Fixed Bypass Diaphragm Kit for Exposed Water Closet Flushometers.

Specifications

Dual Flush Retrofit Handle and Dual Filtered Diaphragm Kit for Exposed Water Closet Flushometers with the following features:

- Retrofits to most any existing valve
- Lifting Handle UP initiates *reduced* flush (1.1 gpf/4.2 Lpf), eliminating liquid and paper waste, saving a ½-gallon of water
- Pushing Handle DOWN initiates *full* flush (1.6 gpf/6.0 Lpf), eliminating all waste
- Reduces water volume by up to 30% when activated UPWARDS
- Antimicrobial Coating protects handle and socket*
- ADA Compliant Metal Non-Hold-Open Handle with Triple Seal Handle Packing
- Distinctive Green Handle signifies Water Conserving Device
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Diaphragm and Handle Packing molded from PERMEX Rubber Compound for Chloramine Resistance
- Includes (2) adhesive backed Metal Wall Plates etched with Instructions

* Antimicrobial coating does not protect users or others against disease-causing bacteria.

NOTES:

- Does not include complete flushometer valve. For complete valve, use Sloan flushometer Models WES-111 or WES-115.
- For Low Consumption (1.6 gpf/6.0 Lpf) Water Closets only. Not intended for use on Water Saver (3.5 gpf/13.2 Lpf) Water Closets.

Made In The
USA



Patent Pending

This space for Architect/Engineer approval

The information contained in this document is subject to change without notice.

SLOAN®

SLOAN • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131
Ph: 1-800-9-VALVE-9 • Fax: 1-800-447-8329 • www.sloanvalve.com